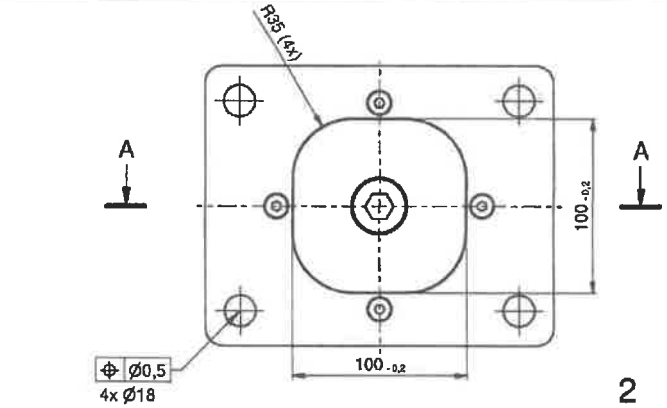



Z (2 : 1)

TRAILER VEHICLE

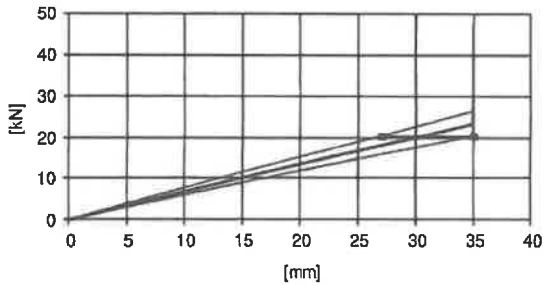

	TRAILER VEHICLE
service load	20,41 kN
min. stiffness	585 N/mm
stiffness (±15%)	688 N/mm
max. stiffness	836 N/mm
max. load	47,7 kN
max. displacement	35 mm
color dot	yellow
class	B

stiffness measured at sub-assembly

A-A

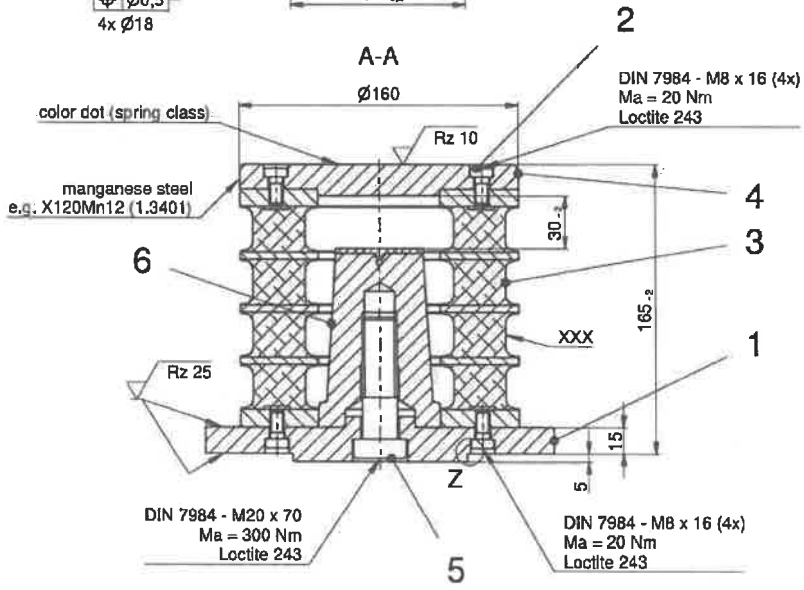

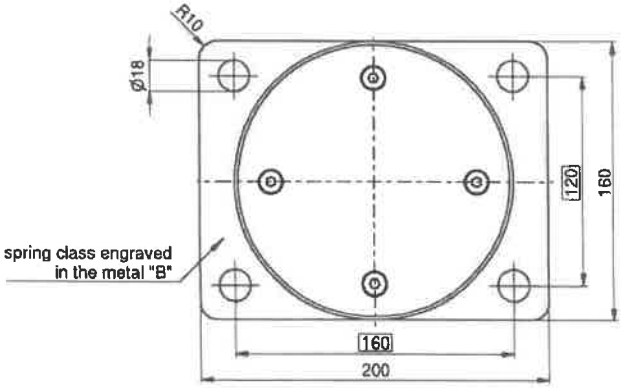

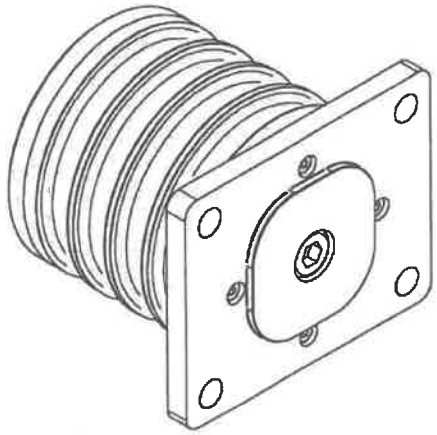

XXX

Markings in rubber (raised):
GMT-Logo
Date of manufacture
62082002

bended
x = rubber layer max 0,5 mm
allowed

QUM TS 005 -107
Galvanischer Überzug
Electroplated coating
without manganese steel plate

-0,3

Injection nops, rubber coating and parting line burr allowable! Paint spray allowable on rubber! For components with surface coating the enlisted dimensions are valid for the status before coating. Consequently, tolerances may be exceeded by the allowable coat thickness.

CAD Zeichnung - Darf manuell nicht geändert werden!
CAD drawing - Must not be changed manually!

Maßstab / Scale: 1 : 2 | Gewicht / Weight: 13,6 kg
Material: Elastomer QP2072
Materials acc. to parts list
All dimensions in mm
Benennung / Description:
Querpuffer
Class B
Zeichnungsnr. / Drawing no.: 62082002
Index: 000
Sheet 1 of 1 sh
Modell: 62082002
A2

The document and its content are confidential and the exclusive property of GMT Gummi-Metall-Technik GmbH (GMT). The reproduction, utilization, or delivery and/or communication of the object and its content to unauthorized third parties without the express written consent of GMT is prohibited. The author reserves all rights to the contents of this document. Any violation will be prosecuted against the breaching person/entity. GMT reserves all rights for patent registration and/or the registration of utility models.