

**VERTICAL, WALL MOUNTED
STAINLESS STEEL AISI 304 SATIN FINISH**

Code: DJ0030CS

General Description


- Liquid soap dispenser, wall mounted.
- Push-button operated.
- Robust and vandal-resistant.
- Suitable for high traffic facilities.
- Model suitable for public use.
- It normally goes along with a warm air hand dryer.

Components & Materials

- Stainless steel AISI 304 body, top filling lid and push-button, 0,8 mm thick, satin finish. It is mounted on the wall by means of 4 wood screws with their corresponding 5 mm wall plugs (the lower ones attach the dispenser, whilst the upper ones fix it to the wall) (screws and wall plugs are provided).
- Anti-dripping and anti-corrosion valve. Design based on a polyamide piston with 2 elastomeric toroidal gaskets, silicone blocking pivot and stainless steel ball to ensure tightness.
- Thermoplastic container, 3 mm thick. Access to its interior using a standard mediclinics ® key supplied.
- Stainless steel AISI 302 springs.
- Housing with 1 viewing slot.

Technical Specifications

| | | | |
|---------------------------------|-----------------------|----------------------------------|--------------------------------|
| Dimensions | 206 x 117 x 116 mm | Capacity | 1,1 L |
| Weight (empty dispenser) | 1,0 Kg | Liquid soaps allowed | All, except for surgical soaps |
| Recommended installation height | 15 - 20 cm from shelf | Quantity dispensed per pulsation | 1 - 1,2 ml |
| Push-button | Stainless steel | Operable force | 26 N |
| Container | Thermoplastic | | |

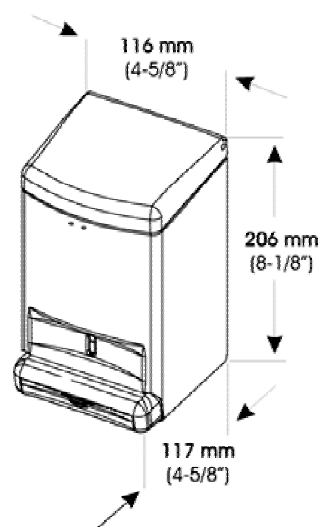

Dim ± 4%

Operation

Press push-button manually to dispense a measured amount of liquid soap. Valve is operable with one hand, without tight grasping, pinching, or twisting of the wrist.

Certificates & Qualifications

ISO 9001:2000.

Specification

Wall mounted soap dispenser, robust and vandal-resistant with a body, top filling lid and push-button made of stainless steel AISI 304, 0,8 mm thick, satin finish. It should be mounted on the wall by means of 4 wood screws with their corresponding 5 mm wall plugs; the lower ones attach the dispenser, whilst the upper ones fix it to the wall. The dispenser should include an anti-dripping and anti-corrosion valve which is based on a polyamide piston with 2 elastomeric toroidal gaskets, silicone blocking pivot and stainless steel ball to ensure tightness. The thermoplastic container should be 3 mm thick and the access to its interior should be using a standard mediclinics ® key supplied. The dispenser should be provided with stainless steel AISI 302 springs and housing with 1 viewing slot. The soap dispenser should be suitable for commercially marketed all purpose liquid and lotion hand soaps and synthetic detergents except for surgical soaps. Overall dimensions shall be 206 x 117 x 116 mm.

Liquid soap dispenser shall be model DJ0030CS, stainless steel AISI 304 satin finish, manufactured by Mediclinics S.A., C/ Industria 54, E-08025 Barcelona, Spain.

Mediclinics, S.A., reserves the right to make changes and/or modifications to the products and their specifications without warning or notice.

Revision 04-2004

© mediclinics S.A.

